


600

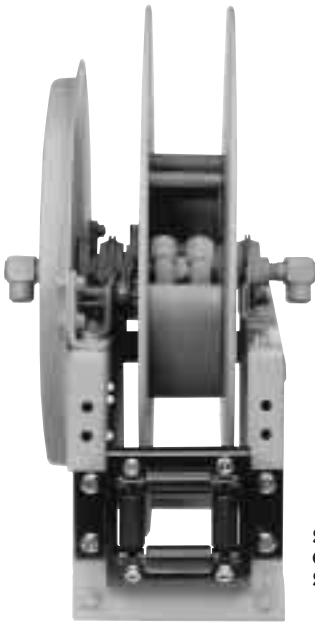

Standard Configuration Shown

SPRING REWIND DUAL HOSE REELS

To handle dual 1/4" through 3/4" I.D. hose.

- Rollformed channel frame for heavy duty applications.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets 90° balanced pressure swivel joints 1/2" male BSP threads. (1" inlet available).
- Standard outlets 1/2" male BSP threads. (3/4" outlet available).
- Pressures to 3000 psi (207 bar)
- Temperatures from -60° F to +250° F (-51°C to +121°C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.
- Reels for use with oxygen/acetylene.
See Series N400 Hannay Reels Welding Catalog H-9422-W.

For:

- Hydraulics
- Air/Water
- Paint Spraying

Model Number	Hose Capacity of Reel					Approx. Weight		Standard Roller Assy	Reel Dimensions***					
	feet					NET	SHIP		C	E	F	G	X	Y
	m.													
I.D. (in) I.D. (mm)	1/4" 6	3/8" 10	1/2" 13	3/4" 19										
O.D. (in) O.D. (mm)	5/8" 16	3/4" 19	7/8" 22	1-9/32" 33										
617-25-26-15.5B	2/75 2/23	2/75 2/23	2/50 2/15	–	93 42.2	128 58.1	R205	15.5 394	26.12 663	15.0 381	25.88 657	5.5 140	22 559	
617-25-26-15.5A	2/100 2/31	2/85 2/26	–	–	120 54.4	155 70.3	R205	15.5 394	26.12 663	15.75 400	25.88 657	5.5 140	22 559	
† 618-30-31-15.5A	–	–	2/100 2/31	2/50 2/15	130 59	165 74.8	R206	15.5 394	29.62 752	21.75 552	31.38 797	6.5 165	25.5 648	

Notes:

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. For a detailed parts breakdown drawing, request ISO 8.
5. **Finish:** refer to Page 4.
6. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2
NPT threads, standard outlets are 1/2" female NPT threads.
† Must specify if 1" joints and 3/4" outlet risers are required.

