


700

SPRING REWIND REELS

To handle 1/4" through 1/2" I.D. hose.

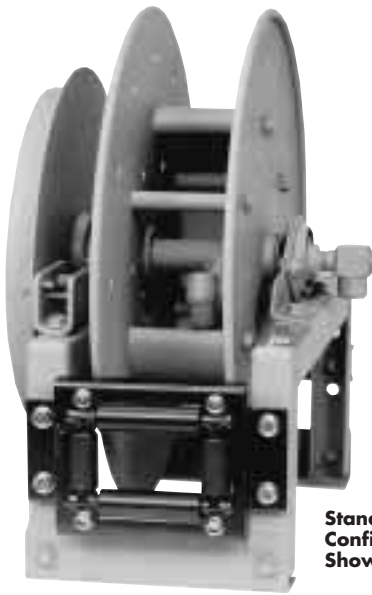

Standard Configuration Shown

- Rollformed channel frame for heavy-duty applications.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet 90° balanced pressure swivel joint 1/2" male BSP threads.
- Standard outlet 1/2" male BSP threads.
- Standard Pressures to 3000 psi (207 bar) (available up to 10,000).
- Temperatures from -60° F to +250° F (-51° C to +121° C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.

For:

- Lubrication
- Air/Water
- Assembly Operations
- Washdown
- Air Tools
- General Industrial Applications

Model Number	Hose Capacity of Reel			Approx. Weight		Standard Roller Assy	Reel Dimensions***							
	feet			NET	Frt. SHIP Wt.		inches							
	m.						C	E	F	G	X	Y		
	I.D. (in) I.D. (mm)	3/8" 10	1/2" 13											
	O.D. (in) O.D. (mm)	3/4" 19	7/8" 22											
716-25-26-15.5B		75 23	75 23	90 41	125 57	R204	15.5 394	26.12 663	12.75 324	25.88 657	4.5 114	22 559		
718-25-26-15.5G		100 30	100 30	96 44	131 59	R206	15.5 394	26.12 663	14.75 375	25.88 657	6.5 165	22 559		
718-30-31-20D		150 46	125 38	112 51	147 67	R206	20 508	29.62 752	15.5 394	31.38 797	6.5 165	25.5 648		

Notes:

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. For a detailed parts breakdown drawing, request ISO 66.
5. **Finish:** refer to Page 4.
6. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2

