



# 7500

## MANUAL OR POWER REWIND REELS

To handle single 1" through 1-1/2" I.D. hose.

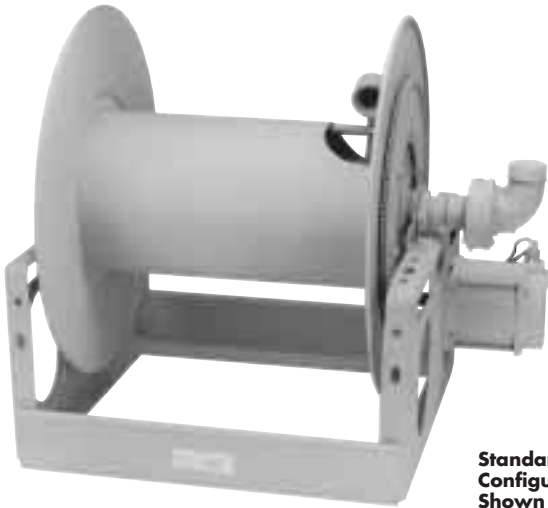

Standard Configuration Shown

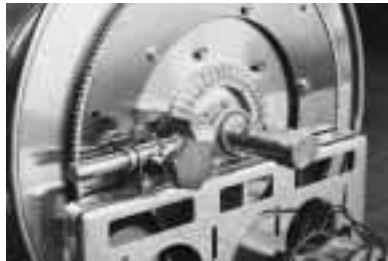

For:

- Fuel Dispensing
- Bulk Transfer
- Suction/Discharge (Consult Factory)

- Heavy-duty reel designed for longer lengths.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake and power rewind reels with a comet brake.
- Standard inlet 90° ball bearing swivel joint 1-1/2" male BSP threads and 2" victaulic groove.
- Standard outlet flanged riser 1-1/2" male BSP threads.
- Standard inlet, outlet riser and hub assembly are steel. Optional bronze or aluminum swivel joint and stainless steel hub assembly and riser, are available.
- Rollers may be purchased as accessory items.
- Operate at pressures to 600 psi (41 bar).
- Temperatures from -40° F to +175° F (-40° C to +79° C).
- Consult factory for other pressures & temps.

Optional Auxiliary Rewind (Ring and pinion shaft rewind unit with removable crank handle)

Model Number	Hose Capacity of Reel <u>feet</u> m.				Approx. Weight Crank Rewind <sup>4</sup> <u>lb.</u> kg.		Reel Dimensions <sup>***</sup> <u>inches</u> mm.					
	I.D. (in) I.D. (mm)	1" 25	1-1/4" 32	1-1/2" 38	NET	SHIP	E	F CRANK	F POWER	G	X	Y
For Power Rewind See Note 5	O.D. (in) O.D. (mm)	1-9/16" 40	1-13/16" 46	2-1/16" 52								
7528-19-21		85 26	70 21	50 15	104 47	146 66	20.5 521	32 813	33 838	21.5 546	17.5 445	16.75 425
7538-23-24		200 61	190 58	100 30	130 59	172 78	22.75 578	41.5 1054	42.5 1080	23.5 597	27 686	16.75 425
7520-25-26		115 35	75 23	50 15	106 48	148 67	25.5 648	23.5 597	24.5 622	27.88 708	9 229	21.75 552
7528-25-26		200 61	135 41	100 30	123 56	165 75	25.5 648	32 813	33 838	27.88 708	17.5 445	21.75 552
7522-30-31		190 58	160 49	100 30	118 54	168 76	28.75 730	25.5 648	26.5 673	29.88 759	11 279	21.75 552
† 7528-30-31		285 87	260 79	160 49	131 59	181 82	28.75 730	32 813	33 838	29.88 759	17.5 445	21.75 552
† 7526-33-34		335 102	200 61	200 61	133 60	183 83	31.75 806	29.25 743	30.25 768	33.62 854	15 381	27.75 705


**Notes:**

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:
 

	Net (lbs.)	Ship (lbs.)	Net (kg.)	Ship (kg.)
Electric	40	40	18.1	18.1
Hydraulic	20	20	9.1	9.1
Air	20	20	9.1	9.1
- When ordering power rewind models, prefix model number with:  
A = Air Rewind EP = Electric Rewind (1/2 hp) HD = Hydraulic Rewind  
(Air rewind reels are supplied with control valve and hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
- For a detailed parts breakdown drawing, request ISO 18.
- Finish:** refer to Page 4.
- 8. Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* x,y indicate mounting holes. See page 2  
† Some applications require a clutch/reduction unit.

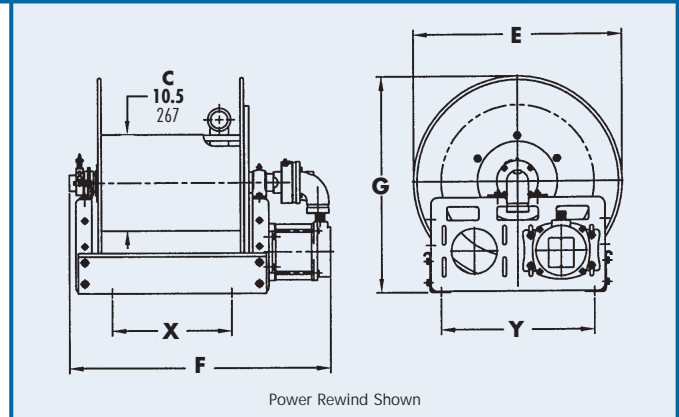

Power Rewind Shown